


THE SPYKER  
ADVANTAGE



Accu-Way™ for Precision

- Adjusts Spread Pattern
- Consistent Performance
- Quick Adjustment
- Saves Money

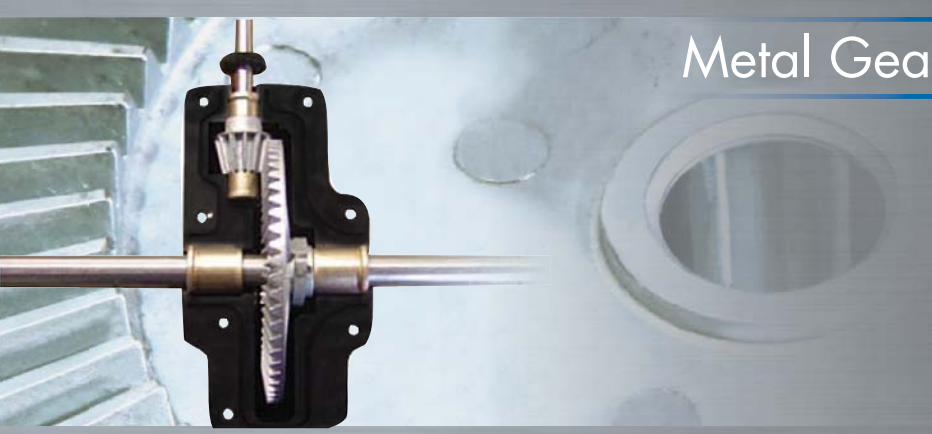

Metal Gear System for Durability

- Lifetime Warranty
- Low Maintenance
- Solid Steel Axle



Spyker Dial for Efficiency

- Eliminates Waste
- 99 Degrees of Precision
- Easy Calibration
- Saves Time



Large Tires for Maneuverability

- Smooth Ride
- Ease of Load Transport
- Pneumatic Tires



Superior lawn care starts with Spyker—a company with a keen focus on making products of unsurpassed quality, performance and versatility. Spyker has excelled in providing customers with a product that is built to outperform and built to outlast. With a focus on everyday demands of a commercial lawn care product, Spyker has put their products to the test and proved their dependability. Having a rich history that reflects the knowledge and experience in the commercial lawn care industry, Spyker (founded in 1868) continues its tradition of excellence.



Visit [www.spyker.com](http://www.spyker.com) for more information or contact customer service at (800) 972-6130

ACCESSORIES



**Side Deflector**  
Prevents spread on walks, planting beds & select areas  
Maintains even spread across spread band  
Stainless steel hardware inhibits rust



**Full Deflector**  
Used to direct product downward (36" width)  
Perfect for ice melt and salt spreading for specific areas  
Stainless steel hardware inhibits rust



**Hopper Cover**  
Prevents spills over hopper  
Protects materials from moisture  
Clear middle for viewable spread level



**Hopper Extension**  
80 lb Spreaders - Expands capacity to 120 lb  
120 lb Spreaders - Expands capacity to 220 lb  
Provides quick and easy solution to bigger jobs



SPYKER SPREADERS

QUALITY

lasting durability

ACCURACY

targeted application

PERFORMANCE

consistent coverage



# ACCESSORIES



## Mulch Basket

Improved spread pattern high-volume application  
Utilized for hybrid seed/fertilizer mulch  
Stainless steel hardware inhibits rust



## Heavy-Duty Agitator

Durable blade for heavy/bulky material  
Perfect for ice melt and salt spreading for specific areas  
Stainless steel hardware inhibits rust



## Top Dressing Kit

Eliminates excessive wear  
Protects transmission from harsh effects of sand  
Stainless steel shaft for rust prevention

# LARGE PLATFORM



## 80 lb Push Spreader

S60-8020 Stainless Frame  
P60-8020 Powder-Coated Frame

Hopper Capacity	80 lb Polypropylene
Transmission	Metal Gears Lifetime Warranty
Spread Pattern	Accu-way System
Wheels	13" x 5" Pneumatic
Gate Control	SS Control Rod
Frame Diameter	1" Steel Tubing

Cover and Screen Included



## 110 lb Push Spreader

S60-9020 Stainless Frame  
P60-9020 Powder-Coated Frame

Hopper Capacity	110 lb Stainless Steel
Transmission	Metal Gears Lifetime Warranty
Spread Pattern	Accu-way System
Wheels	13" x 5" Pneumatic
Gate Control	SS Control Rod
Frame Diameter	1" Steel Tubing

Cover and Screen Included



## 120 lb Push Spreader

S60-12020 Stainless Frame

Hopper Capacity	120 lb Polyethylene
Transmission	Metal Gears Lifetime Warranty
Spread Pattern	Accu-way System
Wheels	13" x 5" Pneumatic
Gate Control	SS Control Rod
Frame Diameter	1" Steel Tubing

Screen Included



## 120 lb Electric Spreader

S80-12010 Stainless Frame

Hopper Capacity	120 lb Polypropylene
Spread Pattern	Accu-way System
Dimensions L x W x H	19.38" x 24" x 22.63"
Motor	12 Volt DC
Gate Control	Foot / Hand Actuator
Vehicle Type	UTV, ATV, ZTR *See manual for details
Frame Diameter	1-1/8" Steel Tubing

Cover and Screen Included



## 125 lb Tow Spreader

S30-12520 Stainless Frame

Hopper Capacity	125 lb Polypropylene
Transmission	Metal Gears Lifetime Warranty
Spread Pattern	Accu-way System
Wheels	13" x 5" Pneumatic
Gate Control	SS Control Link
Frame Diameter	1-1/8" Steel Tubing

Screen Included



## 175 lb Tow Spreader

S30-17520 Stainless Frame  
P30-17520 Powder-Coated Frame

Hopper Capacity	175 lb Polypropylene
Transmission	Metal Gears Lifetime Warranty
Spread Pattern	Accu-way System
Wheels	13" x 5" Pneumatic
Gate Control	SS Control Link
Frame Diameter	1-1/8" Steel Tubing

Screen Included

## 100 Series

## 120 lb Ride-On Spreader

S100-12010 Stainless Frame

Hopper Capacity	120 lb Polypropylene
Transmission	Hydrostatic (Rear Wheel)
Spread Pattern	Accu-way System
Wheels	13" x 6.5" Front 18" x 6.5" Rear
Parking Brake	Foot-Operated Disc Brake
Dimensions L x W x H	60" x 36" x 47"

Cover and Screen Included



**T**HE NEW RIDE-ON SPREADER from Spyker is ready to be put to work. Combining Spyker's industry-leading calibration system and trademark dial with the most durable and maneuverable platform available, the S100 Series is built for heavy workloads. Cable kinks? Gone! Spyker's Ride-On steps up to quality, stainless steel cables, sealed at all joints that are specifically engineered not to bind or kink. Dial-in Spyker's patented Accu-Way™ calibration system to save money, reduce time and waste. The 120 lb. capacity hopper, with oversized stainless steel flow gates, allows for all larger materials such as seed-starters and other top-dressing mixtures. A reliable, 190CC Robin Subaru engine with hydrostatic transmission—in both forward and reverse—gives

you the power necessary to outperform the competition. Oversized front and rear tires with turf-safe tread make the S100 easier to handle and gives a smoother ride even on rough or hilly terrain. While 3 mph is the optimum speed for spreading, switch to 5 mph for travel back to your trailer, engage the parking brake, and use the 3/8" thick welded steel, tie down brackets on both sides of the platform for safer and easier transportation. And to top it off, Spyker's S100 comes standard with our durable, see-through hopper-cover and material screen. Spyker... step up to a BETTER ride-on. Available at Spyker dealers everywhere. Visit us online at [www.spyker.com](http://www.spyker.com).

# MEDIUM PLATFORM



## 50 lb Push Spreader

S40-5020 Stainless Frame  
P40-5020 Powder-Coated Frame

Hopper Capacity	50 lb Polypropylene
Transmission	Metal Gears Lifetime Warranty
Spread Pattern	Accu-way System
Wheels	13" x 5" Pneumatic
Gate Control	SS Control Rod
Frame Diameter	7/8" Steel Tubing

Cover and Screen Included



## 50 lb Push Spreader

S40-5030 Stainless Frame

Hopper Capacity	50 lb Polypropylene
Transmission	Metal Gears Lifetime Warranty
Spread Pattern	Accu-way System
Wheels	13" x 5" Pneumatic
Gate Control	SS Control Rod
Frame Diameter	7/8" Steel Tubing

Cover and Screen Included



Easy-to-reach, built-in handle activates side deflector



Activating the side deflector closes half of gate opening, which eliminates waste by adjusting the amount of material to the reduced spreading area.

# SMALL PLATFORM



## 50 lb Push Spreader

P20-5010 Powder-Coated Frame

Hopper Capacity	50 lb Polypropylene
Transmission	Aluminum Gears
Spread Pattern	Accu-way System
Handle	Adjustable Height
Wheels	10" x 4" Pneumatic
Gate Control	Control Rod

Cover and Screen Included



## 40 lb Push Spreader

P20-9010 Powder-Coated Frame

Hopper Capacity	40 lb Stainless Steel
Transmission	Aluminum Gears
Spread Pattern	Accu-way System
Handle	Adjustable Height
Wheels	10" x 4" Pneumatic
Gate Control	Control Rod



## Handheld Spreader

HHS100

Hopper Capacity	5 lb
Hopper Design	Funnel Shape
Handle	Ergonomic Trigger
Flow Gate	Adjustable